

# Specifications

MODEL		GS™-3384 RT	
MEASUREMENTS		Metric	US
Working height maximum*		12.06 m	39 ft
<b>A</b>	Platform height maximum	10.06 m	33 ft
<b>B</b>	Platform height - stowed**	1.55 m	5 ft 1 in
<b>C</b>	Platform length:	3.98 m	13 ft 0.5 in
	outside, extended - single deck	5.34 m	17 ft 6.25 in
	outside, extended - dual deck	6.57 m	21 ft 6.5 in
<b>D</b>	Slide-out platform extension deck - front	1.52 m	5 ft
<b>E</b>	Slide-out platform extension deck - rear	1.22 m	4 ft
<b>F</b>	Platform width - outside	1.83 m	6 ft
<b>G</b>	Height - stowed: - folding guardrails	2.68 m	8 ft 9.5 in
	- rails lowered	2.00 m	6 ft 6.75 in
<b>H</b>	Length - stowed with outriggers	4.88 m	16 ft
<b>I</b>	Width: - standard tyres	2.13 m	7 ft
	- high flotation tyres	2.41 m	7 ft 11 in
<b>J</b>	Wheelbase	2.84 m	9 ft 4 in
<b>K</b>	Ground clearance - centre	0.33 m	13 in


PRODUCTIVITY		
Maximum platform occupancy	7	7
Lift capacity	1,134 kg	2,500 lbs
Lift capacity - extension deck	227 kg	500 lbs
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed***	50%	50%
Maximum outrigger leveling: - front to back	7°	7°
- side to side	12°	12°
Turning radius - inside	3.09 m	10 ft 1.5 in
Turning radius - outside	5.94 m	19 ft 6 in
Raise/lower speed	45 / 29 sec	45 / 29 sec
Controls	proportional	
Drive	four wheel	
Tyres - foam-filled rough terrain	25 x 79 cm	10 x 31 in

POWER		
Power source	Deutz D2011L03i 3 cylinder diesel 36 kW (49 hp) air cooled	
Auxiliary Power unit	12 V DC	
Fuel tank capacity	113.6 L	30 gal
Hydraulic system capacity	113.6 L	30 gal

WEIGHT****		
with outriggers	6,743 kg	14,866 lbs

**STANDARDS COMPLIANCE**      ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Based on RT tyres. Deduct 2 in (5.8 cm) for turf and non-marking.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.

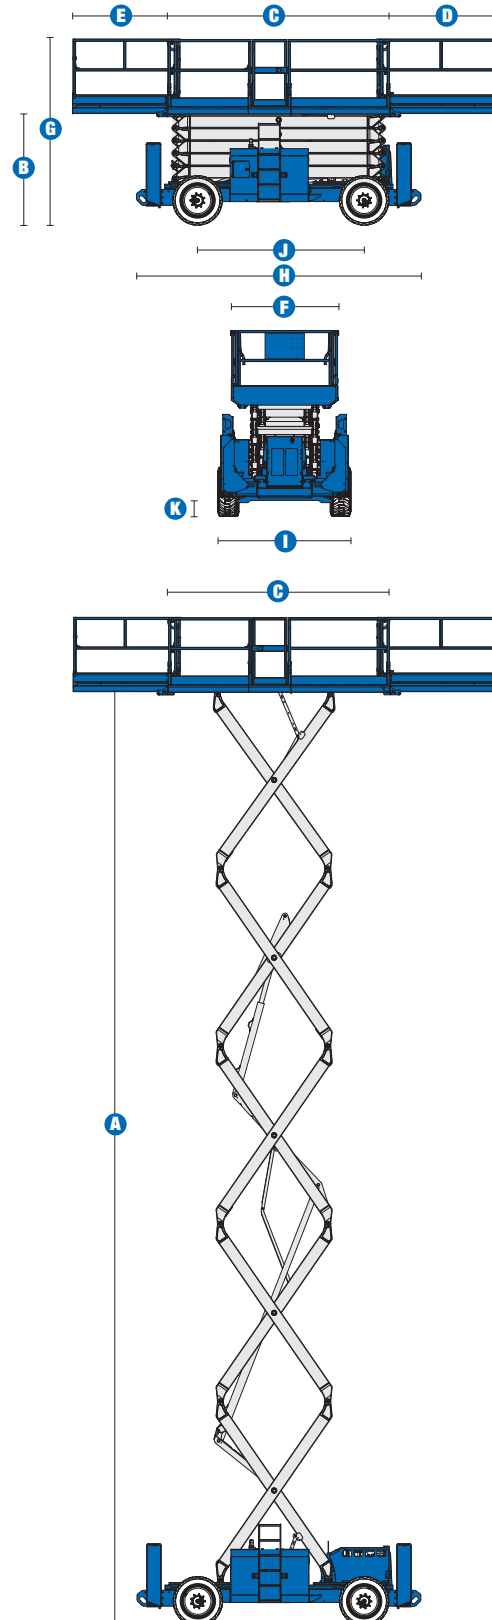

# Features

## STANDARD FEATURES

### MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lbs) lift capacity

### PRODUCTIVITY

- 3.98 m x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform with replaceable diamond plate deck
- Dual slide-out platform extension decks 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- Automatic leveling hydraulic outriggers
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- Two self-closing full height swing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Hydraulic oil cooler
- Foam-filled rough terrain tyres
- Tilt alarm
- Descent alarm
- Horn
- Hour meter
- Dual flashing beacons
- Motion alarm

### POWER

- Deutz diesel 36 kW (49 hp)

## OPTIONS & ACCESSORIES

### PRODUCTIVITY

- Air line to platform
- Non-marking rough terrain tyres 25 x 79 cm (10 x 31 in)
- High flotation foam-filled tyres 41 x 84 cm (16 x 33 in)
- Platform work lights

### POWER OPTIONS

- 7 kVA Hydraulic generator (240 V/50 Hz)
- Cold weather package
- Arctic package
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- 240V power to platform



## Genie Australia – Toll free number 1800 788 633

**Brisbane (Head Office)**  
33 Kimberley Street  
Darra QLD 4076

**Sydney**  
74 Glendenning Road  
Glendenning NSW 2761

**Melbourne**  
374 Hammond Road  
Dandenong VIC 3175

**Perth**  
83 Bannister Road  
Canning Vale WA 6155

## Genie United States Distributed by:

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington  
98073-9730

Effective Date: April, 2009. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. © 2009 Terex Corporation.

GS-3384RT 090327 Ver1

[www.genieindustries.com](http://www.genieindustries.com)